

DualComfort™

Keep your energy costs to a minimum

The combination of Ducted Gas Heating with refrigerative cooling provides a superior whole home climate control solution at an affordable rate.

The ultimate form of air-conditioning

The system combines the best form of heating and the best form of cooling. It can be zoned, utilises common ductwork and allows you to maintain your desired level of comfort all year.

Better performance in cold ambient temperatures

When the outside temperature drops close to zero the Ducted Gas Heater of the DualComfort™ heating and cooling solution outperforms electric reverse cycle systems. In colder weather, gas heating is more effective and more comfortable, as the heat output of gas appliances is not affected by low ambient temperatures, which is the case with reverse cycle systems.

Considering cooling? You should read this.

The Brivis StarPro series of Ducted Gas Heaters provide the flexibility to integrate a Brivis ICE™ (Integrated Cooling Equipment) refrigerated system, all while using the exact same ductwork and grilles - saving you both time and money. We call this technology, Brivis DualComfort™.

The Brivis DualComfort™ whole of home Ducted Gas Heating and refrigerative cooling solution allows you to create that perfect feeling of

comfort throughout your home. DualComfort™ provides both refreshing, refrigerated cooling, or comfy gas heating. The technologies used in the DualComfort™ heating and cooling solution combines a StarPro series Ducted Gas Heater with Brivis ICE™ and a Networker controller; and are a culmination of 50 years of Brivis heating and cooling experience in Australia.

DualComfort™ product features

- ZonePlus™ compatible (StarPro only)
- Advanced control options
- Australian designed, locally made for more than 50 years
- Brivis ICE™ Add-On refrigerated cooling system
- Electronic ignition and integrated diagnostics
- Duct work installation flexibility (under floor or in roof space)
- Heating and cooling from the one controller

Flexible installation options

With the DualComfort™ heating and cooling solution you can install both the gas heating and refrigerated cooling at the same time, or install just the heating first, ready for the cooling to be added in at a later date. Simple.


Ask your installer about being Brivis ICE™ ready

What makes DualComfort™ ducted air conditioning so attractive?

- Fully integrated gas heating and Brivis ICE™ refrigerated cooling system. The best of both worlds
- Staggered installation options allowing you to install heating first and cooling later, lowering your initial upfront cost
- Common ductwork and grilles for both heating and cooling to rooms, meaning low cost installation
- Flexibility to customise system for whole-of-home or zoned heating and cooling, meaning lower running cost
- Brivis NC-6 Networker controller has built in zoning functionality which is simple and easy to use

When installing a Brivis ICE™ Add-on refrigerated cooling system to an existing Ducted Gas Heating system, care must be taken to ensure the duct system is sized and designed correctly. If you are installing a heating system and plan to install Brivis ICE™ Add-on refrigerated cooling system at a later date, then ensure that you advise your dealer and they will size the system accordingly.

Brivis ICE™

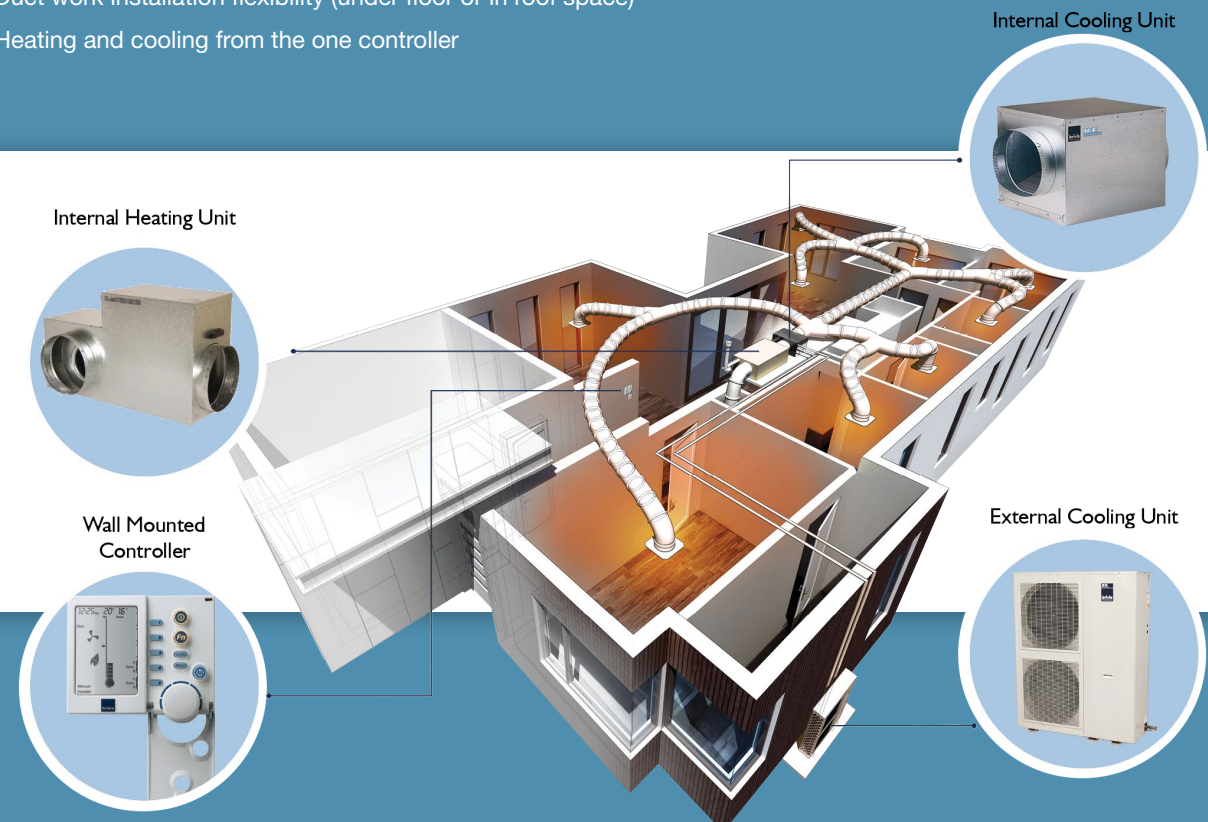

Controllers

The Brivis Networker


The Brivis Networker Controller can operate in either auto or manual modes. In manual mode, you set your own temperature, then leave the rest to the Networker. It will maintain the temperature you have chosen, until you choose to turn it off. In auto mode the Networker allows you to preset temperatures and times to turn the system on and off. This means that you can wake up to a nice warm house in winter.

The Networker is designed with an easy-to-use rotary dial, an easy-to-read LCD screen and is backlit using Electro-Luminescence (EL) technology, making the screen easier to read in poorly lit areas or at night. Two Networkers can be used together to provide enhanced temperature control.* During warmer weather the Networker can be used to operate a Brivis cooling system.

Whether in heating or cooling mode, the Networker can be programmed to turn off after you've gone to sleep giving you comfortable sleeping conditions.

Programmable Controller

The Programmable Controller can operate in either auto or manual modes. To program you simply preset temperatures and times for the heating/cooling system to turn on and off. This Controller is suitable for Brivis ICE™ system with the Classic Heater Range.



Networker Features


- Electro- Luminescence (EL) technology
- Large on-screen icons
- LCD backlit display screen
- Temperature dial
- Preset ON-OFF times
- On board diagnostics

Sensor Features

- Slimline
- Discrete
- Non Volatile Memory

Manual Controller

The Manual Controller is a simple to use heating only thermostat with a large easy to read digital display.



Specifications

Brivis Ducted Gas Heater	Star Rating	Capacity (kW)	Airflow (L/s) @ 100Pa ESP	Dimensions (L x W x H)	Net Weight (kg)	LPG / ULPG
StarPro SP6 Series						
SP615IN	6.0	14.0	630	1021 x 395 x 634	57	-
SP623EN	6.0	23.0	660	1046 x 416 x 750	68	ULPG
SP623EN-XA	6.0	23.0	705	1046 x 416 x 750	68	ULPG
SP623IN	6.0	23.0	720	1021 x 395 x 634	58	ULPG
SP623IN-XA	6.0	23.0	755	1021 x 395 x 634	58	ULPG
SP630EN	6.0	29.0	890	1096 x 568 x 810	89	ULPG
SP630EN-XA	6.0	29.0	1020	1096 x 568 x 810	89	ULPG
SP630IN	6.0	29.0	1085	1070 x 547 x 684	78	ULPG
SP630IN-XA	6.0	29.0	1120	1070 x 547 x 684	78	ULPG
SP635IN	6.0	35.0	1155	1070 x 547 x 684	78	ULPG
StarPro HX Series						
HX15I	5.7	15.0	630	1021 x 395 x 634	57	-
HX23E	5.8	23.0	660	1046 x 416 x 750	68	LPG
HX23E-XA	5.8	23.0	705	1046 x 416 x 750	68	LPG
HX23I	5.8	23.0	720	1021 x 395 x 634	58	LPG
HX23I-XA	5.8	23.0	755	1021 x 395 x 634	58	LPG
HX30E	5.7	29.0	890	1096 x 568 x 810	89	LPG
HX30E-XA	5.7	29.0	1020	1096 x 568 x 810	89	LPG
HX30I	5.7	29.0	1085	1070 x 547 x 684	78	LPG
HX30I-XA	5.7	29.0	1120	1070 x 547 x 684	78	LPG
HX35I	5.6	35.0	1155	1070 x 547 x 684	78	-
StarPro SP5 Series						
SP515IN	5.0	14.0	600	1021 x 395 x 634	53	-
SP521EN	5.0	21.0	645	1046 x 416 x 657	66	-
SP521EN-XA	5.0	21.0	685	1046 x 416 x 657	66	-
SP521IN	5.0	21.0	740	1021 x 395 x 634	53	-
SP521IN-XA	5.0	21.0	770	1021 x 395 x 634	53	-
SP530EN	5.0	30.0	995	1096 x 568 x 707	85	-
SP530EN-XA	5.0	30.0	1000	1096 x 568 x 707	85	-
SP530IN	5.0	30.0	1110	1070 x 547 x 684	71	-
SP530IN-XA	5.0	30.0	1170	1070 x 547 x 684	71	-
SP535IN	5.0	35.0	1190	1070 x 547 x 684	72	-

* The two Networkers must be 'NC-3' or 'NC-6' models. The Networker cannot be used with Brivis ICE™ system on Classic heater range.

Brivis Ducted Gas Heater	Star Rating	Capacity (kW)	Airflow (L/s) @ 100Pa ESP	Dimensions (L x W x H)	Net Weight (kg)	LPG / ULPG
StarPro MX Series						
MX21E	4.4	21.0	645	1046 x 416 x 657	66	-
MX21E-XA	4.4	21.0	685	1046 x 416 x 657	66	-
MX21I	4.4	21.0	740	1021 x 395 x 634	53	-
MX21I-XA	4.4	21.0	770	1021 x 395 x 634	53	-
MX30E	4.3	30.0	995	1096 x 568 x 707	85	-
MX30E-XA	4.3	30.0	1000	1096 x 568 x 707	85	-
MX30I	4.3	30.0	1110	1070 x 547 x 684	71	-
MX30I-XA	4.3	30.0	1170	1070 x 547 x 684	71	-
MX35I	4.2	35.0	1190	1070 x 547 x 684	72	-
B-Max Series						
BH20E(300mm)* **	5.1	23	365	1046 x 416 x 1127	57	-
BH20E(350mm)* **			420		68	-
BH28E(350mm)* **	5.5	29	720	1096 x 568 x 1222	68	-
BH28E(400mm) **			770		58	-
StarPro SP4 Series						
SP415	4.1	15.5	555	845 x 397 x 625	65	-
SP421	4.8	21.0	555	845 x 397 x 625	65	-
SP430	4.2	30.0	953	923 x 549 x 644	84	-
SP435	4.0	35.0	1041	923 x 549 x 644	84	-
Compact Classic Series						
CC315IN	3.0	15.0	500	724 x 411 x 604	52	-
CC320IN	3.5	19.5	500	724 x 411 x 604	53	-
CC320IN-XA	3.5	19.5	570	724 x 411 x 604	53	-
CC325IN	3.1	23.5	560	724 x 411 x 604	53	-
CC325IN-XA	3.1	23.5	620	724 x 411 x 604	53	-
CC330IN	3.3	30.0	940	843 x 564 x 640	71	-
CC330IN-XA	3.3	30.0	1000	843 x 564 x 640	71	-
Classic Series						
2P Wombat 15	3.6	14.5	495	1000 x 400 x 784	49	LPG
2P Wombat 20	3.8	20.0	560	1000 x 400 x 784	49	LPG
2P Wombat 20XA	3.8	20.0	725	1000 x 400 x 784	49	LPG
2P Wombat 26	3.7	25.5	970	1080 x 525 x 812	64	LPG
2P Wombat 26XA	3.7	25.5	1050	1080 x 525 x 812	64	LPG
Buffalo 15	2.8	13.5	455	1090 x 395 x 1130	74	LPG
Buffalo 20	2.8	18.5	455	1090 x 395 x 1130	74	LPG
Buffalo 20XA	2.8	18.5	535	1090 x 395 x 1130	74	LPG
Buffalo 26	2.8	26.0	845	1320 x 565 x 1175	114	LPG
Buffalo 26XA	2.8	26.0	1090	1320 x 565 x 1175	114	LPG
Downflow 20	2.5	20.5	485	457 x 395 x 1122	53	LPG
Downflow 20XA	2.5	20.5	510	457 x 395 x 1122	53	LPG
Upflow 20	2.5	20.5	490	457 x 395 x 1122	53	LPG
Upflow 20XA	2.5	20.5	560	457 x 395 x 1122	53	LPG
Upflow 26	2.5	26.0	1075	485 x 565 x 1250	76	LPG
Upflow 26XA	2.5	26.0	1210	485 x 565 x 1250	76	LPG

Brivis ICE™ - DualComfort™							
System Overview		10	13	15	18	22	
Power Supply		V-ph-Hz	220-240-1-50			400-415-3-50	
Mode			Inverter			Conventional	
Cooling Capacity	Nominal Capacity	kW	10	13	15	18	22
	Rated Capacity ¹	kW	9.3	12.5	14.7	17.1	21.1
	Capacity Range	kW	4.8 ~ 10.1	6.3 ~ 13.6	7.5 ~ 15.9	N/A	
	Rated Input	W	2.96	3.91	4.62	5.12	5.70
	AEER		3.11	3.15	3.16	3.33	3.70
Brivis ICE™ Outdoor Unit			DONSC10Z7	DONSC13Z7	DONSC15Z7	DO-SC18Z9	DO-SC22Z9
Power Supply		V-ph-Hz	220-240-1-50			400-415-3-50	
Maximum Input Current		A	22.0	28.0	30.0	20.9	20.9
Compressor		Type	Rotary	Rotary	Scroll	Scroll	Scroll
Sound Pressure Level		dB(A)	62 ²	62 ²	62 ²	56 ³	56 ³
Sound Power Level			71	71	72	70	70
Dimensions	Dimensions (L x W x H)	mm	990 x 354 x 966	938 x 392 x 1369	938 x 392 x 1369	1258 x 450 x 1390	1258 x 450 x 1390
	Net Weight	kg	70	100	122	161	161
Refrigerant Piping	Refrigerant	Type	R410A				
	Gas Connection Size	mm	15.9	19.0	19.0	22.2	28.6
	Liquid Connection Size	mm	9.5	9.5	9.5	12.7	12.7
	Recommended Interconnecting Pipe Size - Gas (mm)	1 - 10m	15.9	19.0	19.0	22.2	28.6
		10 - 30m				28.6	28.6
	Recommended Interconnecting Pipe Size - Liquid (mm)	1 - 10m	9.5	9.5	9.5	9.5	12.7
		10 - 30m				12.7	12.7
	Precharged Length	m	10	10	10	15	15
	Max. Pipe Length	m	65	65	65	30	30
	Max. Height Diff (CDU below)	m	25	25	25	8	8
Max. Height Diff (CDU above)	m	30	30	30	8	8	
Ambient Temperature Limits		°C	-15 ~ 50	-15 ~ 50	-15 ~ 50	-5 ~ 46	-5 ~ 46
Brivis ICE™ Indoor Unit			DINXU10Z7	DINXU13Z7	DINXU15Z7	DI-XU18Z	DI-XU22Z
Power Supply		V-ph-Hz	220-240-1-50			N/A	
Description		Type	Compact A-Frame Coil				
Airflow	Rated	L/s	561	688	736	920	992
	Minimum	L/s	430	550	620	750	900
Coil Static Pressure Drop	@ Rated Airflow (Dry / Wet)	Pa	95 / 118	96 / 120	88 / 110	138 / 173	101 / 127
	@ Minimum Airflow (Dry / Wet)	Pa	56 / 70	62 / 77	62 / 78	91 / 114	82 / 103
Dimensions	Dimensions (L x W x H)	mm	668 x 611 x 542	668 x 611 x 542	680 x 686 x 542	680 x 627 x 542	777 x 748 x 549
	Net Weight	kg	35	35	40	36	41
Duct Connection (Outlet)		mm	Φ350	Φ400	Φ450	Φ450	Φ500
Duct Connection (Inlet)		mm	Φ350	Φ350	Φ400	Φ400	Φ450
Condensate Drain Connection		mm	20	20	20	20	20
Refrigerant Pipe Connections	Gas	mm	15.9	19.0	19.0	22.2	28.6
	Liquid	mm	9.5	9.5	9.5	12.7	12.7
Operating Temperature Limits		°C	19 ~ 32	19 ~ 32	19 ~ 32	17 ~ 32	17 ~ 32
Note 1: Capacities rated in accordance with AS3823; Note 2: dB(A) @ 1.5m; Note 3: dB(A) @ 3m.							
Brivis Ducted Gas Heater Compatability (Table indicates maximum recommended add-on cooling capacity for specific heater models.)							
Heater Range	Brivis ICE™ Inverter			Brivis ICE™ Conventional			
	10	13	15	18	22		
SP6	SP615I	SP623I, SP623E, SP623E XA	SP623I XA	SP630E, SP630E XA, SP630I, SP630I XA	SP635I		
SP5	SP515I	SP521I, SP521E, SP521E XA	SP521I XA	SP530E, SP530E XA, SP530I, SP530I XA	SP535I		
SP4	SP415UN, SP421UN		SP430 UN	SP435 UN			
StarPro HX	HX15I	HX23E, HX23E XA, HX23I	HX23I XA	HX30E, HX30E XA, HX30I, HX30I XA	HX35I		
StarPro MX		MX21E, MX21E XA, MX21I	MX21I XA	MX30E, MX30E XA, MX30I, MX30I XA	MX35I		
Classic	2PW20, B20 XA,		2PW20 XA, B26	2PW26 XA, B26XA			
Compact Classic ⁺	CC315, C320, CC320 XA, CC325	CC325 XA,	CC330, CC330 XA				

February 2014 - All specifications subject to change without notice. E&OE. All Brivis Classic heaters are Brivis Networker compatible but require an interface to be fitted at additional cost. Brivis Networker not compatible with Brivis ICE™ Add-on refrigerated cooling system on Brivis Classic Heaters.

⁺ Brivis CC3 Ducted Gas Heaters do not have on-board Add-On Cooling connections.

Note: All images provided in this brochure are for illustration purposes only.

Due to our policy of continuous improvement, product specifications and details are subject to change without notice.

Technical Specifications

Talk to us

For all sales and
service enquiries:

Australia - Brivis Pty Ltd

Telephone: 1300 BRIVIS (1300 274 847)

Email: sales@brivis.com.au

Web: brivis.com.au

New Zealand - Distributed by Warm Air Ltd

Telephone: 0800 WARMAIR (0800 9276 247)

Email: sales@warmair.co.nz

Web: warmair.co.nz

South Africa - Distributed by Lorenz and Associates

Telephone: 0861 BRIVIS (0861 274 847)

Email: info@brivis.co.za

Web: brivis.co.za



Consult your local authorised Brivis
dealer for the best advice



GWA
Smarter Solutions

© Brivis Climate Systems Pty Ltd
AU: 24752 ABN: 64 096 079 088
All rights reserved FEB2014 FSA/BCS0007